

## CP860 CPE DATASHEET



# CP860

## LTE Indoor CPE

3GPP Release 12

CAT12

802.11a/b/g/n/ac

VoIP or VoLTE

The CP860 from SUNWAVE is a premium indoor LTE CPE, designed for 802.11a/b/g/n/ac dual band Wi-Fi access. The product provides optimized high throughput data and a wide area coverage network for residential, commercial and enterprise users, supporting multiple services. Customers enjoy reliable dual-band Wi-Fi AP functions, broadband access and hot-spot Wi-Fi connections with the CP860.

## CP860 CPE DATASHEET

RF SPECIFICATIONS		
Support Bands	Option 1	LTE: B1/3/7/8/20/38/41/42/43/48
	Option 2	LTE: B7/38/41
CA	DL Inter/Intra 2CA/3CA/4CA UL Inter/Intra 2CA	
MIMO	DL 2CA (4 x 4 MIMO 64 QAM) DL 4CA (2 x 2 MIMO 256 QAM) UL 2CA (2 x 2 MIMO 64 QAM)	
Output Power@25°C/ 77°F	23 ± 2dBm	
LTE Antenna	4 built-in antennas	
LTE Antenna Gain	700 MHz ~ 1 GHz	3 dBi
	1.5 GHz ~ 2.7 GHz	5 dBi
	3.4 GHz ~ 3.8 GHz	5 dBi
Wi-Fi	Wi-Fi frequency	2.4 GHz/ 5GHz
	Wi-Fi antenna	Built-in high-gain Wi-Fi antenna
	Wi-Fi output power	19dBm @2.4GHz
		16dBm @5GHz
	Wi-Fi channel BW	20 MHz & 40 MHz & 80 MHz
Wi-Fi antenna gain	2.4 GHz: 3 dBi	
	5G Hz: 3 dBi	


HARDWARE SPECIFICATIONS	
LTE Standard	3GPP Release 12, CAT 12
Flash	2 GB
RAM	2 GB
Ethernet LAN Port	2 Gb RJ45 LAN port 10/100/1000M auto-sensing, auto-MDI/ MDIX
Voice POTS Port	1 RJ11
LED	8 LED indicators (PWR, Wi-Fi, TEL, NET, RF Signal x 4)
SIM	1 USIM/ SIM (3FF)
Reset/Reboot Button	Tact switch
LTE Antenna	4 built-in antennas
Dimensions	204.5 mm x 169 mm x 60 mm   8.05 in x 6.65 in x 2.36 in
Weight	< 500 g   1.1 lbs
Power Consumption	< 12W
Power Supply	AC 100 ~ 240V
	DC 12V 2A

# CP860 CPE DATASHEET

## ENVIRONMENT SPECIFICATIONS

<b>Temperature</b>	Operating	-10 °C ~ 55 °C   14 °F ~ 113 °F
	Storage	-40 °C ~ 85 °C   -40 °F ~ 185 °F
<b>Humidity</b>	Operating	5 ~ 95%
	Storage	5 ~ 95%

## TOPOLOGY

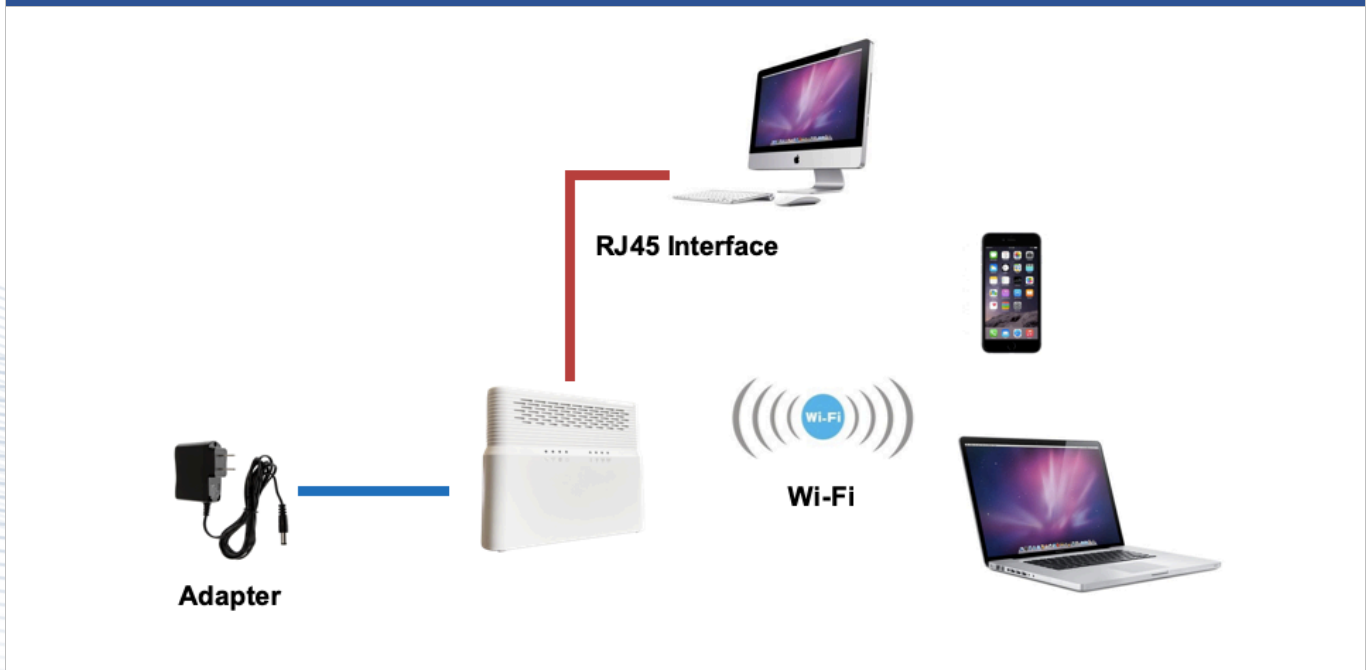

## SOFTWARE SPECIFICATIONS

<b>Peak Throughput</b>	TDD DL 560 Mbps UL 30 Mbps
	FDD DL 800 Mbps UL 150 Mbps
<b>Operation Mode</b>	NAT mode
	Route Mode
	Bridge Mode
<b>Device Management</b>	TR069
	SNMP
	WebUI
	Software Upgrade - FOTA
<b>Network Protocols and Features</b>	Multi-APN
	NAT/NATP
	SNTP/NITZ
	Static Routing
	Virtual server and DMZ

## CP860 CPE DATASHEET

	DNS relay and DDNS
	IGMP snooping and IGMP proxy
	DHCP server
	IPV4/IPv6 Dual Stack
	UPnP
	Parents control
<b>VPN</b>	IPsec
	L2TP over IPsec
	GRE over IPsec
	GRE L2/L3
	PPTP
	L2TP V2/V3
<b>Security and Firewall</b>	Firewall
	MAC address filtering
	IP address filtering
	URL filtering
	DDOS
<b>VoIP/ VoLTE Functions</b>	Call waiting
	Call hold/ resume
	Call forward on busy/ no answer
	Call transfer blind transfer/ attended transfer/ early attended transfer
	3-way conferencing
	Caller ID display/ blocking
	DTMF
FAX/ modem	
<b>Wi-Fi Functions</b>	Hide SSID broadcasting
	Encryption: WPA-PSK (TKIP), WPA-PSK (AES), WPA2-PSK (TKIP), WPA2-PSK (AES)
	Maximum users: 64
	AP Isolation
	Guest network

Contact Us Today  
[en.sunwave.com](http://en.sunwave.com)